
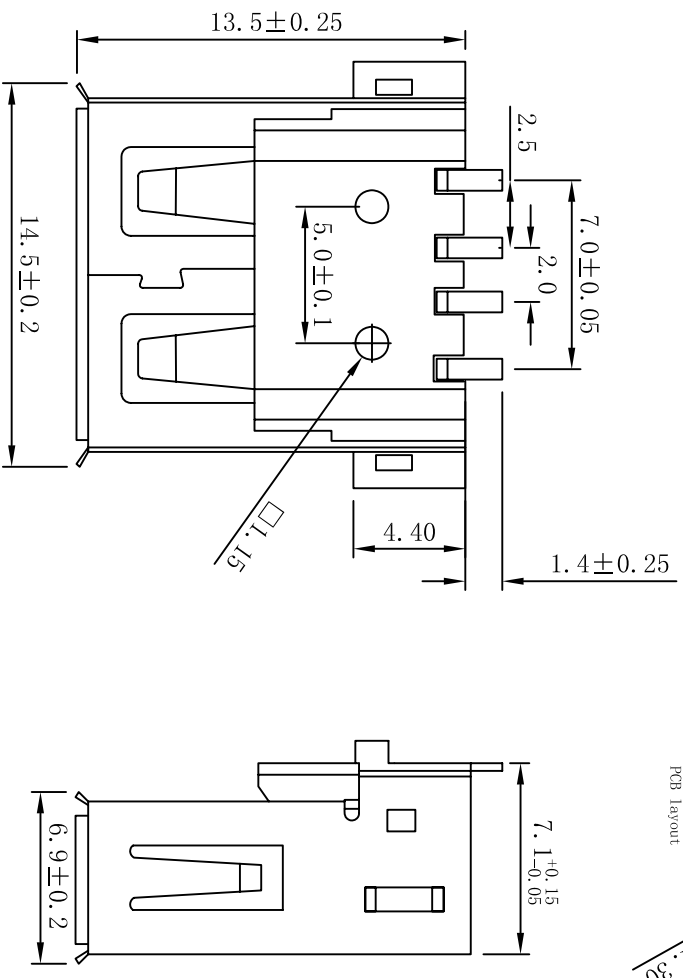


版次	修改内容	日期

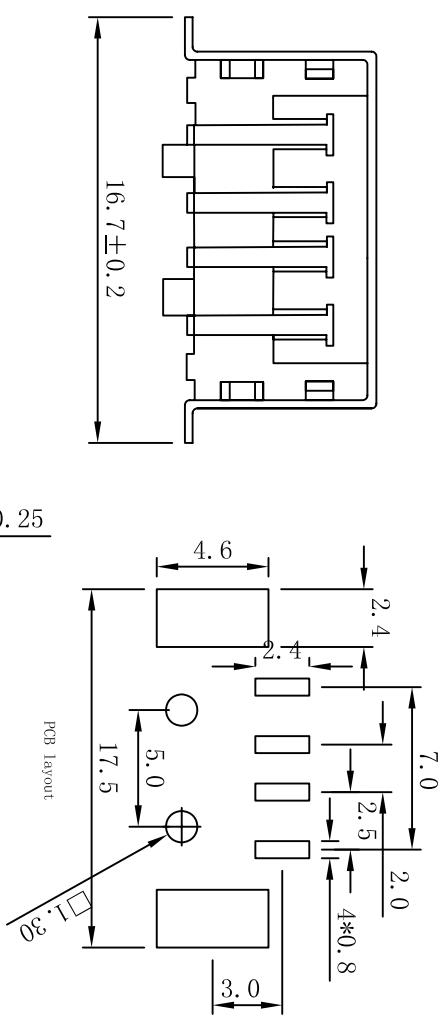

- Note:
1. Material:
 - 1.1 Housing: High temperature thermoplastic with g.f, UR94V-0
 - 1.2 Contact: copper alloy, t=0.20mm
 - 1.3 Shell: copper alloy, t=0.25mm
 2. Specification:
 - 2.1 Current rating: 1 A Max.
 - 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - 2.3 Contact resistance: 50 mW Max.
 - 2.4 Insulation resistance: 100 MW Min.
 - 2.5 Total mating force: 3.57 Kgf Max.
 - 2.6 Total unmating force: 1.0 Kgf Min. 0.81~2.05 Kgf Min. after 10000 insertion/extraction cycles
 - 2.7 Temperature range: -30° C~80° C

APPROVED:	UNLESS OTHERWISE SPECIFIED TOLERANCE	ACH	雅創电子有限公司
CHECKED:	X.X ±0.20		ACH ELECTRONICS CO., LTD
DRAWN:	X.XX ±0.15	TEL: 0755-8821011 FAX: 0755-88210123	
UNIT	1cy	DRAWN NAME:	USB 4PIN AF SMT SMD COLUMN
REV	2016-08-31	CUSTOMER NO:	
A/0		PRODUCT NO:	
mm		CUSTOMER P/N:	