版次	修 改 内 容	日期

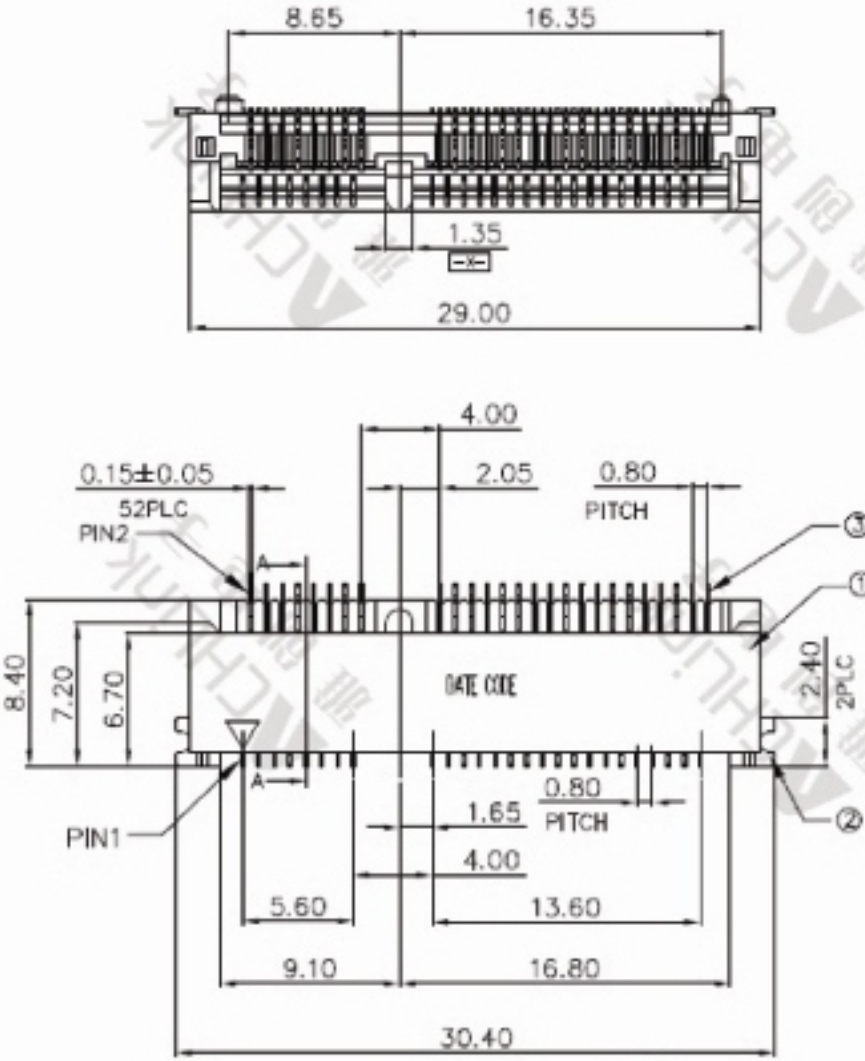



SECTION A-A



NOTES:

1. MATERIAL:
   HOUSING: LCP+30% G.F. UL94V-0 BLACK;
   TERMINAL: COPPER ALLOY(C5191 T=0.20mm);
   LEG: COPPER ALLOY(C2680 T=0.3mm);
2. ELECTRICAL CHARACTERISTICS:
   a. VOLTAGE RATING: 50V AC PER CONTACT;
   b. CURRENT RATING: 0.5 AMP PER CONTACT;
   c. DIELECTRIC WITHSTANDING VOLTAGE: 300V AC RMS (Min);
   d. INSULATION RESISTANCE: 500MΩ AT 500V DC Min;
   e. CONTACT RESISTANCE: 55mΩ Max (INITIAL);

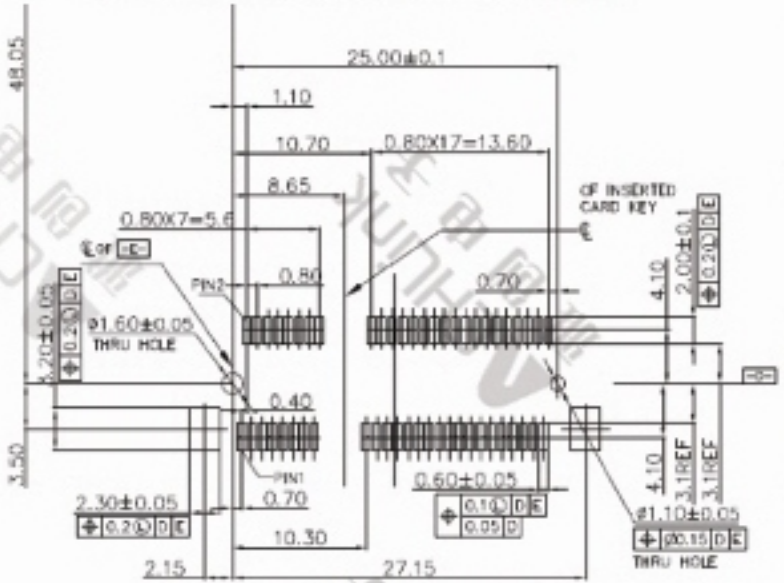

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS:1.20±0.05mm

APPROVED:			UNLESS OTHERWISE SPECIFIED TOLERANCE	ACH	雅創电子有限公司 ACH ELECTRONICS CO., LTD
CHECKED:			X.X ±0.20		TEL:0755-88210101FAX:0755-88210123
DRAWN:	1cy	2016-08-31	X.XX ±0.15	DRAWN NAME:	Mini PCI express 52pin socket 0.80 Pitch. H5.20mm. Dual-SMT Type
	UNIT	REV	X.XXX ±0.05	PRODUCT NO:	
	mm	A/0	CUSTOMER NO:	CUSTOMER P/N:	